

08-07-00

X

EXPRESS MAIL: EL155987042US
 Date of Deposit: August 4, 2000

DOCKET NO. KG-1486**PATENT APPLICATION TRANSMITTAL SHEET**

Box Patent Application
 Assistant Commissioner for Patents
 Washington, DC 20231

Inventor(s): Shivanand Majagi et al.

For: GRADED COMPOSITE HARDMETALS

Transmitted herewith for filing is the above-identified patent application along with:

- ☒ 4 sheet(s) of drawings
☒ One unsigned Declaration & Power of Attorney (4 pages)
☒ Petition to Group Director under 37 CFR 1.84b (in duplicate) and one sheet of photomicrograph (Figures 4-5) in triplicate

Fees are calculated as follows: ☐ Small Entity ☒ Other**CLAIMS AS FILED**


	Number Filed		Number Extra		Rate		Fee
Total Claims	41	-20 =	21	X	\$18	=	\$378
Independent Claims	4	-3 =	1	X	\$78	=	78
Multiple Dependent Claims				+	\$260		
Basic Fee					\$690		\$690
TOTAL FEE							\$1,146

Authorization for fee for Petition to Group Director under 37 CFR 1.84b is provided on the enclosed Petition to Group Director under 37 CFR 1.84b.

- ☒ Charge deposit account **11-0508** in the amount of **\$1,146.00**
☒ A duplicate copy of this letter is enclosed.

The Commissioner is hereby authorized to charge any additional fees included in 37 CFR 1.16 and 1.17 which may be required, or credit any overpayment, to said Deposit Account.

Respectfully submitted,



John J. Prizzi
 Attorney for Applicant(s)
 Registration No. 29,970
 Phone: 724-539-5331
 Date: August 4, 2000

Kennametal Inc.
 P. O. Box 231
 Latrobe, PA 15650

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



In the application of: Shivanand Majagi et al.

Serial No. To be assigned

Filed: August 4, 2000

For: GRADED COMPOSITE HARDMETALS

August 4, 2000

Box Patent Application
ASSISTANT COMMISSIONER FOR PATENTS
Washington, DC 20231

Sir:


CERTIFICATE OF MAILING BY "EXPRESS MAIL" UNDER 37 CFR 1.10

"Express Mail" mailing label number: EL155987042US

Date of Deposit: August 4, 2000

I hereby certify that this paper; 43-page application (including claims and abstract); 4 sheets of drawings; one unsigned Declaration and Power of Attorney (four pages); one Petition to Group Director under 37 CFR 1.84b, in duplicate, with accompanying one sheet of photomicrograph (Figures 4-5), in triplicate; and one-page transmittal sheet, in duplicate, are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Box Patent Application, Assistant Commissioner for Patents, Washington, DC 20231.

John J. Prizzi
Name of Person Mailing Paper


Signature of Person Mailing Paper

EXPRESS MAIL NO. EL155987042US
Date of Deposit August 4, 2000

GRADED COMPOSITE HARDMETALS

Inventors: Shivanand Majagi
Robert W. Britzke
Daniel W. Nelson

5

BACKGROUND

The present invention relates generally to hardmetals and, more particularly, to a body having multiple-regions including at least one hardmetal body.

- 10 Hardmetal is a term used to describe a monolithic material composed of a hard particulate bond with a binder. The hard particulate comprises a nonmetallic compound or a metalloid. The hard particulate may or may not be interconnected in two or three dimensions.
- 15 The binder comprises a metal or alloy and is generally interconnected in three dimensions. Each monolithic hardmetal's properties are derived from the interplay of the size distribution of the hard particulate, amount of the hard particulate, composition of the hard
- 20 particulate and the composition of the binder.

- A hardmetal family may be defined as a monolithic hardmetal consisting of a specified hard particulate combined with a specified binder component. Tungsten carbide bonded or cemented together by a cobalt alloy
- 25 is an example of a WC-Co family and is commonly referred to as a WC-Co cemented carbide. The properties of a hardmetal family may be tailored, for example, by adjusting either separately or together an amount of the hard particulate, a size distribution of
- 30 the hard particulate, or a composition of the binder. However, there is the principle that the improvement of one material property invariably decreases another. For example, in the WC-Co family as resistance to wear

is improved through an increase in hard particulate amount that in turn results in the decrease of binder amount and the resistance to breakage generally decreases. A design around the principle is to combine
5 several monolithic hardmetals to form a multiple-region hardmetal body.

The resources (i.e., both time and money) of many individuals and companies throughout the world have been directed to the development of multiple-region
10 cemented carbide bodies. The amount of resources directed to the development effort is demonstrated by the number of publications, US and foreign patents, and foreign patent publications on the subject. Some of the many US and foreign patents, and foreign patent
15 publications include: US Patent Nos. 2,888,247; 3,909,895; 4,194,790; 4,359,355; 4,427,098; 4,722,405; 4,743,515; 4,820,482; 4,854,405; 5,074,623; 5,333,520; and 5,335,738, and foreign patent publication nos. DE-A-3 519 101; GB-A 806 406; EPA-O 111 600;
20 DE-A-3 005 684; DE-A-3 519 738; FR-A-2 343 885; GB-A-1 115 908; GB-A-2 017 153; and EP-A-0 542 704.

Some resources have been expended for "thought experiments" and merely present wishes -- in that they fail to teach the methods of making such multiple-
25 region cemented carbide bodies.

Other resources have been spent developing complicated methods. Some methods included the pre-engineering of starting ingredients, green body geometry or both. For example, the starting
30 ingredients used to make a multiple-region cemented carbide body are independently formed as distinct green bodies. Sometimes, the independently formed green

- bodies are also independently sintered and, sometimes after grinding, assembled, for example, by soldering, brazing or shrink fitting to form a multiple-region cemented carbide body. Other times, independently
- 5 formed green bodies are assembled and then sintered. The different combinations of the same ingredients that comprise the independently formed green bodies respond to sintering differently. Each combination of ingredients shrinks uniquely. Each combination of
- 10 ingredients responds uniquely to a sintering temperature, time, atmosphere or any combination of the proceeding. Only the pre-engineering of forming dies and, thus, green body dimensions allows assembly followed by sintering. To allow the pre-engineering,
- 15 an extensive database containing the ingredient's response to different temperatures, times, atmospheres or any combination of the proceeding is required. The building and maintaining of such databases are cost prohibitive. To avoid those costs, elaborate process
- 20 control equipment might be used. This too is expensive. Further, when using elaborate process control equipment, minor deviations from prescribed processing parameters rather than yielding useful multiple-region cemented carbide bodies -- yield scrap.
- 25 Still other resources have been expended on laborious methods for forming multiple-region cemented carbide bodies. For example, sub-stoichiometric monolithic cemented carbide bodies are initially sintered. Their compositions are deficient with
- 30 respect to carbon and thus the cemented carbides contain eta-phase. The monolithic cemented carbide bodies are then subjected to a carburizing environment

that reacts to eliminate the eta-phase from a periphery of each article. These methods, in addition to the pre-engineering of the ingredients, require intermediate processing steps and carburizing equipment. Furthermore, the resultant multiple-region cemented carbide bodies offer only minimal benefits since once the carburized peripheral region wears away, their usefulness ceases.

Some recent methods include those discussed in US Patent Nos. 5,541,006; 5,697,046; 5,686,119; 5,762,843; 5,789,686; 5,792,403; 5,677,042; 5,679,445; 5,697,042; 5,776,593; and 5,806,934, all assigned to Kennametal. Although these patents teach satisfactory alternatives for making multiple-region cemented carbide bodies there is still room for improvement.

It is apparent that there is a need for multiple-region cermet bodies and cemented carbide bodies that can be inexpensively manufactured. Further, there exists a need for multiple-region cermet bodies and cemented carbide bodies that further exhibit superior wear resistance and can be inexpensively manufactured.

SUMMARY OF THE INVENTION

The present invention is directed to a new and improved multiple-region tool piece including a hardmetal. The tool piece includes a hardmetal body including a hard particle component and a binder; an additional body, which may include a metal body, a ceramic body, and/or an additional hardmetal body including a hard particle component and a binder; a substantially discontinuous gradient-free boundary layer between the hardmetal body and the additional

body; and a mating surface between the hardmetal body and the additional body.

In the preferred embodiment, the hard particle components are a carbide, such as a tungsten carbide.

- 5 The carbide grain size may be about 0.2 micrometers (μm) to about 40 μm . The hardmetal body binder is selected from one of cobalt, nickel and iron and their alloys, with cobalt being preferred. Also, in the preferred embodiment, the binder is about 0 weight
10 percent (wt. %) to about 25 wt.% of the hardmetal body.

- In the preferred embodiment, the mating surface includes a male portion on one of the bodies (e.g., a metal body, a ceramic body, and/or a hardmetal body) and a corresponding female portion on the other of the
15 bodies (e.g., a metal body, a ceramic body, and/or a hardmetal body). The mating surface may be symmetrical, such as axially symmetrical (e.g., a dimple) or asymmetrical. In a preferred embodiment when the size of the bodies are substantially
20 disparate, the mating surface is asymmetrical, such as when a body of a thickness of about 20 μm to about 30 is incorporated on or into the surface of another body.
- The mating surface may further including both micro and/or macro mating features.

- 25 These and other features, aspects and advantages of the present invention will be better understood with reference to the following description of the preferred embodiment, appended claims and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

- 30 FIGURE 1A depicts an isometric view of a bit constructed according to an aspect of an embodiment of the present invention;

FIGURE 1B depicts a cross-sectional schematic view of the bit of Figure 1A according to an aspect of an embodiment of the present invention;

FIGURE 2A depicts a bit constructed according to
5 an aspect of an embodiment of the present invention;

FIGURE 2B depicts an exploded view of the bit of Figure 2A demonstrating the male mating surface according to an aspect of an embodiment of the present invention;

10 FIGURE 2C depicts an exploded view of the bit of Figure 2A demonstrating the female mating surface according to an aspect of an embodiment of the present invention;

FIGURE 3A depicts a superhard material substrate
15 carrier according to an aspect of an embodiment of the present invention;

FIGURE 3B depicts an exploded view of Figure 3A demonstrating the male mating surface according to an aspect of an embodiment of the present invention;

20 FIGURE 3C depicts an exploded view of Figure 3A demonstrating the female mating surface according to an aspect of an embodiment of the present invention;

FIGURE 4 depicts a microstructure of a mating surface between a hardmetal body and an additional
25 hardmetal body according to an aspect of an embodiment of the present invention;

FIGURE 5 depicts a mating surface containing micro and macro components according to an aspect of an embodiment of the present invention; and

30 FIGURES 6A-6C depict cross-sectional schematic views of mating surfaces according to an aspect of an embodiment of the present invention.

DESCRIPTION

In the following description, like reference characters designate like or corresponding parts throughout the several views. Also in the following description, it is to be understood that such terms as "forward," "rearward," "left," "right," "upwardly," "downwardly," and the like are words of convenience and are not to be construed as limiting terms.

Referring now to the drawings in general and Figures 1A-1B in particular, it will be understood that the illustrations are for the purpose of describing a preferred embodiment of the invention and are not intended to limit the invention thereto. As best seen in Figure 1, a multiple-region body or bit, generally designated 10, is shown constructed according to the present invention. Bit 10 is comprised of a hardmetal body 12 and an additional body 14 with a mating surface 16. Figure 2B shows a cross-sectional schematic view of the hardmetal body 12 and the additional body 14 of the bit 10 emphasizing the male mating surface 20 and the female mating surface 22.

Referring now to Figures 2A-2C, a multiple-region body or bit, generally designated 10, is shown constructed according to the present invention. Bit 10 is comprised of a hardmetal body 12 and an additional hardmetal body 14 with a mating surface 16 (only the exterior interfacial line is shown in Figure 2A). Figure 2B shows an exploded view of the hardmetal body 12 and the additional hardmetal body 14 of the bit 10 emphasizing the male mating surface 20. Figure 2C shows an exploded view of the hardmetal body 12 and the

additional hardmetal body 14 of the bit 10 emphasizing the female mating surface 22.

The present invention is related to the multiple-region body having a hardmetal body 12; an additional
5 body 14, which may be a metal body, a ceramic body and/or an additional hardmetal body; and a mating surface 16 there between. Each hardmetal body comprises a hard particulate component bound by a binder. As discussed in greater detail below, the hard
10 particulate may comprise any of those known in the art and preferably comprises a carbide, even more preferably a tungsten carbide. When a carbide is used, the grain size of the hard particulate may be about 0.2 to 40 μm . Also as discussed in greater detail below,
15 the binder for each of the hardmetal bodies may comprise any of those known in the art including cobalt, nickel, iron, combinations thereof and alloys thereof. The binder content for each hardmetal body may be about 0 wt. % to about 25 wt. %.

20 In another aspect of the present invention, the second body is any one of a metal body, a ceramic body, and an additional hardmetal body. Any metal body or ceramic body that will survive the processing used to make multiple-region bodies that have the desired
25 function may be used. Examples of metal bodies include iron and iron based alloys (e.g., steels); nickel and nickel based alloys; cobalt and cobalt based alloys; and combinations thereof. Examples of ceramic bodies include at least one of boride(s), nitride(s),
30 carbide(s), oxide(s), silicide(s), their mixtures, their solutions, and any combination of the preceding such as borocarbides, boronitrides, carbonitrides,

oxynitrides, oxycarbonitrides and borocarbonitrides. Composites of two or more of the preceding are also contemplated. The metal of the at least one of borides, nitrides, carbides, oxides, or silicides includes one or more metals from IUPAC groups 2, 3 (including lanthanides and actinides), 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 and 14. Preferably, additional hard components comprise one of boride(s), nitride(s), carbide(s), oxide(s), or silicide(s) their mixtures, their solutions and any combination of the preceding. The metal of the of boride(s), nitride(s), carbide(s), oxide(s), or silicide(s) comprises one or more metals from IUPAC groups 3 (including lanthanides and actinides), 4, 5, and 6; and more preferably one or more of Ti, Zr, Hf, V, Nb, Ta, Cr, Mo and W. Examples of ceramics included, without limitation, alumina, zirconia, silicon nitride, aluminum nitride, silicon carbide, boron carbide, titanium boride, titanium nitride, silicon oxynitride, as well as composites thereof.

Various aspects of the present invention relating to a hardmetal body and an additional hardmetal body may include the following: (1) the binder content of the hardmetal body being different from the additional hardmetal body; (2) the grain size of the hard particulate of the hardmetal body being different from that of the additional hardmetal body; (3) binder composition of the hardmetal body being different from the additional hardmetal body; (4) the hard particulate composition of the hardmetal body being different from that of the additional hardmetal body; and any combination thereof such as (5) both the binder content

and the grain size of the hard particulate of the hardmetal body being different from that of the additional hardmetal body; (6) both the binder content and composition of the hardmetal body being different
5 from that of the additional hardmetal body; (7) both the binder composition and the grain size of the hardmetal body being different from the additional hardmetal body; (8) both the grain size and hard particulate composition of the hardmetal body being
10 different from the additional hardmetal body; (9) the binder content, grain size of the hard particulate and binder composition of the hardmetal body being different from that of the additional hardmetal body...etc.

15 Another aspect of the present invention relates to the use of a multiple-region body as a superhard material support as illustrated in Figure 3A. Superhard materials may include diamond, cubic boron nitride, and carbon nitride. Specifically, the body or
20 superhard material support 10 is comprised of a hardmetal body 12 and an additional hardmetal body 14 with a mating surface 16 therebetween. Figure 3B shows an exploded view of the hardmetal body 12 and the additional hardmetal body 14 of the superhard material
25 support 10 emphasizing the male mating surface 20. Figure 3C shows an exploded view of the hardmetal body 12 and the additional hardmetal body 14 of the superhard material support 10 emphasizing the female mating surface 22.

30 With regard to the multiple-region body 10 of Figures 1A-3C, it will be understood that the types of bodies illustrated therein are for the purpose of

demonstrating certain aspects of the present invention and are not intended to limit the types nor geometry of bodies that applicants contemplate may be made according to the present invention. Other types of
5 bodies incorporating multiple-region bodies contemplated to be within the scope of the present invention include, among others, bodies for materials manipulation and removal applications, such as, buttons or inserts, or portions of buttons or inserts, for oil
10 field tools, petroleum industry or exploration tools, mining, construction, agricultural, wear, and metal removal applications, some of which are discussed in more detail herein and others which will be apparent to those skilled in the art.

15 In a polished metallographic cross section, the distinct bodies making up a multiple-region body according to the present invention can be seen. For example, as demonstrated by the rendering of a photomicrograph of Figure 4 from a hardmetal body 12
20 and an additional hardmetal body 14, the hardmetal body 12 is comprised of hard particles 40 bound together by binder 42. The mating surface 16 between the hardmetal body 12 and the additional hardmetal body 14 is distinct. Further, the additional hardmetal body 14 is
25 comprised of hard particles 40 bound together by binder 32. Another feature that becomes apparent after further metallographic analysis of the multiple-region bodies is the substantially pore-free nature of the hardmetal body or bodies and/or the substantially
30 gradient-free boundary therebetween. For example, when the porosity of the bodies is determined using ASTM Standard B 276-91, Standard Test Method for Apparent

Porosity in Cemented Carbides, values up to A00, B00 and C00 are obtained. Porosities better than A02, B00 and C00 may be a characteristic of the hardmetal body and the additional hardmetal body; however, the

5 porosity may not be any higher than A06, B00 and C08. When observing the interface or boundary between a hardmetal body and an additional body that is a metal body or a ceramic body, again substantially no porosity is observed at the interface.

10 Yet another aspect of the present invention relates to the nature of the mating surfaces between the hardmetal body and the additional body. For example, the multiple-region bodies 10 in Figures 2 and 3 depict the mating surface 16 of the hardmetal body 12

15 as a male mating surface 20 while that of the additional hardmetal body 14 as a female mating surface 22. The mating surface 16 may be described as reference macro feature including perturbations that may be described as micro features. The perturbations

20 increase, for example, the interfacial surface area of the perturbed macro feature relative to an unperturbed macro feature. For example, a planar surface may be the reference macro feature that may be perturbed to include micro features such as a substantially square

25 wave feature, a substantially triangular wave feature, a substantially sinusoidal wave feature and combinations thereof. A convenient approach for describing the micro and macro features may be the ratio of the area of an unperturbed macro feature to

30 the area of the same but perturbed macro feature. For example, an unperturbed reference macro feature for a bit 10 as shown in Figure 2 may be a disk having an

- area of πr^2 , where r is the radius of the right cylinder. The perturbed macro feature may be approximated as a hemisphere having an area of $2\pi r^2$. The ratio of the macro feature area to the perturbed macro feature area for this example is $\pi r^2:2\pi r^2$ or 1:2.
- Applicants believe that the macro feature area:perturbed macro feature area ratio may range from approximately just greater than about 1:1 to about 1:50, preferably from approximately just greater than about 1:1 to about 1:25, and more preferably from approximately just greater than about 1:1 to about 1:10. The perturbation of a macro feature provides a mechanical interlock between the hardmetal body and the additional body that increases interfacial bond strength of the two bodies to provide a longer lasting multiple-region body in use.

- In an aspect of the present invention, the mating surfaces may be described as being symmetrical, for example, about an axis or plane or even exhibiting rotational symmetry or mirror symmetry. Similarly, the mating surfaces may be described as being asymmetrical.

- Applicants have found that when the bodies of a multiple-region body have substantial size disparities, it is advantageous for the mating surface to be asymmetrical. For example, when an additional body having a thickness of about 20-30 μm is incorporated on a hardmetal body in the centimeter scale, asymmetrical mating surfaces provide superior integrating in the resultant multiple-region body. Applicants believe that arrangement of a hardmetal body and an additional hardmetal body would be particularly advantageous when the additional hardmetal body comprises a superhard

filler hardmetal body such as that disclosed in commonly assigned U.S. Application Serial No. _____ entitled A SUPERHARD FILLER HARDMETAL INCLUDING A METHOD OF MAKING, filed on July 13, 2000, in the names of S. Majagi, J. Eason, and R.W. Britzke, the disclosure of which is hereby incorporated by reference herein.

Another feature of the present invention is illustrated in FIGURE 5. Specifically, FIGURE 5 shows a macro interface 26 that is substantially flat in cross sectioned, with a micro feature 24 characterized as a sinusoidal interlocking of the hardmetal and additional hardmetal. Figures 6A-6C present cross sectional schematics of macro and/or micro interfacial features. Applicants contemplate that the macro and/or micro interfacial features may comprise any variety of features including those having uniformity, shape variations, height variations, width variations, height and width variations, shape and height variations, shape and width variations, and shape, height and width variations. Figure 6A depicts a feature having, among other things, a width variation where half circles are regularly alternated with half ovals or half ellipses to create mating surface 16. Figure 6B depicts a feature having, among other things, a shape variation where triangles are uniformly distributed to create mating surface 16. Figure 6C depicts a feature having, among other things, a height variation where half ovals or half ellipses of different heights are distributed to create mating surface 16. Applicants contemplate that other shapes may be used to create a mating surface such as a sawtooth curve, a sinusoidal curve,

portions and/or truncations of such curves either alone or in combination with whole and/or truncated half circles, half ovals, half ellipses and triangles.

Some macro and/or micro interfacial features of mating surface 16 may be represented as a periodic function that may be subdivided into a finite number of continuous intervals within its period. Such a function may be expanded in its interval into a convergent series known in mathematics as a Fourier series. See for example, Gieck, K. "Arithmetic: Fourier Series" in: Engineering Formulas (New York, NY, McGraw-Hill Book Company 1979, pp. D12-D14), which is herein incorporated by reference. Macro and/or micro interfacial features that may be represented using Fourier series include symmetrical features and asymmetrical features. Some examples include half circles, half ovals, half ellipses, triangles, sawtooth curves, and truncated versions of any of the preceding.

In addition, an interfacial feature having frequency modulation, amplitude modulation, and frequency and amplitude modulation may be represented by a Fourier series. To that end, applicants contemplate that any macro and/or micro interfacial feature having mating surface strength enhancing ability may be represented as a Fourier series and may be used as a mating surface 16.

Cemented Carbides

In an aspect of the present invention, the multiple-region body 10 comprises cemented carbide bodies. In this aspect, each hardmetal body, which may include a hardmetal body and, optionally, an additional hardmetal body, includes a hard particulate comprising

a carbide of one or more metals from IUPAC groups 3 (including lanthanides and actinides), 4, 5, 6, their mixtures, their solutions, and any combination of the preceding. Preferably, the hard particulate comprises
5 a carbide of one or more of Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, their mixtures, their solutions, and any combination of the preceding. More preferably, the hard particulate comprises a carbide of tungsten, its mixtures, its solutions, any combination of the
10 preceding.

The size of a hard particulate according to this aspect may range from submicrometer to about 500 μm or greater. Submicrometer includes nanostructured hard particulate having structural features ranging from
15 about 1 nanometer to about 100 nanometers or more.

In an aspect relating to cemented carbides, in particular tungsten carbide cemented carbide, the size of a hard particulate may range from submicron to about 500 μm or greater. Preferred sizes of a hard
20 particulate comprising WC range from about 0.2 μm to about 40 μm .

Cermets

In an alternative aspect of the present invention, the multiple-region body 10 comprises cermet bodies.
25 In this alternative aspect, each hardmetal body, which may include a hardmetal body, and, optionally, an additional hardmetal body, includes a hard particulate comprising a carbonitride of one or more metals from IUPAC groups 3 (including lanthanides and actinides),
30 4, 5, 6, their mixtures, their solutions, and any combination of the preceding. Preferably, the hard particulate comprises a carbonitride of one or more of

- Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, their mixtures, their solutions, and any combination of the preceding. More preferably, the hard particulate comprises a carbonitride of titanium, its mixtures, its solutions,
- 5 any combination of the preceding.

- The size of a hard particulate according to this alternative aspect may range from submicrometer to about 500 μm or greater. Submicrometer includes nanostructured first hard component 14 having
- 10 structural features ranging from about 1 nanometer to about 100 nanometers or more.

Binder

- In any of the preceding aspects of embodiments and/or embodiments, the binder may comprise one or more
- 15 metals from IUPAC groups 8, 9 and 10; more preferably, one or more of iron, nickel, cobalt, their mixtures, and their alloys. When the multiple-region body 10 comprises a cermet, the binder preferably comprises nickel or nickel alloys such as nickel-iron alloys and
- 20 nickel-cobalt alloys. When the multiple-region body 10 comprises a cemented carbide, the binder preferably comprises cobalt or cobalt alloys such as cobalt-tungsten alloys and cobalt-nickel-iron alloys. The binder may comprise a single elemental metal, mixtures
- 25 of metals, alloys of metals and any combination of the preceding.

- An amount of binder of a hardmetal body according to any of the above embodiments may comprise about 0 wt.% to about 25 wt.% or greater.

30 Additional Hard Particulate

In any of the preceding aspects of the embodiments and the embodiments, a second hard particulate, a third

hard particulate, and any additional hard particulate of a hardmetal body may comprise at least one of boride(s), nitride(s), carbide(s), oxide(s), silicide(s), their mixtures, their solutions, and any combination of the proceeding. The metal of the at least one of borides, carbide, oxides, or silicides includes one or more metals from IUPAC groups 2, 3 (including lanthanides and actinides), 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 and 14. Preferably, additional hard components comprise one of boride(s), nitride(s), carbide(s), oxide(s), or silicide(s) their mixtures, their solutions and any combination of the preceding. The metal of the of boride(s), nitride(s), carbide(s), oxide(s), or silicide(s) comprises one or more metals from IUPAC groups 3 (including lanthanides and actinides), 4, 5, and 6; and more preferably one or more of Ti, Zr, Hf, V, Nb, Ta, Cr, Mo and W. Silicon carbide is an additional hard particulate that applicants believe may be advantageously used. Other additional hard particulates or further hard particulates may include intermetallics such as aluminides of nickel (e.g., Ni_3Al , NiAl , ..., etc.), aluminides of titanium (e.g., TiAl , ..., etc.), and alumina.

25 Making A Multiple-Region Body

A multiple-region body 10 may be produced by starting with conventional powder metallurgical technology as described in, for example, "World Directory and Handbook of HARDMETALS AND HARD MATERIALS" Sixth Edition, by Kenneth J. A. Brookes, International Carbide DATA (1996); "PRINCIPLES OF TUNGSTEN CARBIDE ENGINEERING" Second Edition, by George

Schneider, Society of Carbide and Tool Engineers (1989); "Cermet-Handbook", Hertel AG, Werkzeuge + Hartstoffe, Fuerth, Bavaria, Germany (1993); "CEMENTED CARBIDES", by P. Schwarzkopf & R. Kieffer, The Macmillan Company (1960); and any of US Patent Nos. 5,541,006; 5,697,046; 5,686,119; 5,762,843; 5,789,686; 5,792,403; 5,677,042; 5,679,445; 5,697,042; 5,776,593; and 5,806,934, all assigned to Kennametal- the subject matter of which is herein incorporated by reference in its entirety in the present application.

In forming a multiple-region body 10, at least one mixture of a hard particulate, optionally an additional hard particulate and a binder or binder precursor is formed. Methods for forming such mixtures are described in, for example, U.S. Patent Nos. 4,070,184; 4,724,121; 5,045,277 and 5,922,978, and include spray drying and mechanical mixing. The binder or binder precursor may be any source such as metal powders or composite powders previously described that may be intimately mechanically mixed with the hard particulate and, when used, an additional hard particulate. Preferably the binder or binder precursor is a metal powder that has an average particle size that is at most about 10 μm in diameter, more preferably at most about 5 μm , and most preferably at most about 2 μm in diameter. The binder or binder precursor powder is desirably of a purity that does not form undesirable phases or promote the formation of undesirable phases such as eta phases in the superhard filler hardmetal comprising tungsten carbide. Preferably the binder or binder precursor powder contains an amount of contaminants of at most about 1

percent by weight of the metal powder, contaminants being elements other than C, W, Fe, Co or Ni. More preferably the amount of contaminants is at most about 0.5 percent, and most preferably 0.2 percent by weight of the transition metal powder.

Each mixture may also contain organic additives such as binders that improve the ability of each mixture to be shaped into a porous body. Representative binders include paraffin wax, synthetic waxes such as microcrystalline wax, or linear or branched chain polymers such as polyethylene or polypropylene. The binders, typically, are soluble in a solvent such as a straight chain alkane (e.g., heptane) that may be used to mix the components of the mixture together

Each mixture is formed by mechanically mixing the hard particulate, a binder or binder precursor and any optional components, such as an additional hard particulate or organic additives as previously described. The mechanical mixing may be any convenient form of mechanical mixing, such as ultrasonic agitating, ball milling, attriting, homogenizing v-blending or mixing and stirring, that intimately mixes the hard particulate, the additional hard particulate when used, and a binder or binder precursor. In an embodiment including a hard particulate and a binder or binder precursor, ball milling or attrition is preferably used.

Each mixture, including the hard particulate and the binder or binder precursor may be mixed dry or in a solvent as long as the environment does not deleteriously oxidize or hydrolyze the mixture's components. Preferably, a mixture is prepared in a

solvent such as a low molecular weight straight chain alkane such as octane, heptane or hexane, which may be, subsequently, removed by drying, the drying being a convenient method such as vacuum or spray drying

- 5 Each mixture is then formed, either serially or in parallel, into a green body by a convenient method such as those known in the art, examples being, uniaxial pressing in hard steel tooling, dry or wet bag cold isostatic pressing in rubber tooling, extrusion and
10 injection molding. The particular method is selected primarily by the shape that is desired. For the present invention, uniaxial pressing, dry or wet bag isopressing produce satisfactory results. Some of these methods are described in, for example, US Patent
15 Nos. 5,541,006; 5,697,046; 5,686,119; 5,762,843; 5,789,686; 5,792,403; 5,677,042; 5,679,445; 5,697,042; 5,776,593; and 5,806,934.

- Before consolidating, the green body may be heated to remove any organic additives that may have been
20 added to aid processing. This heating, commonly referred to as dewaxing, may be performed at a temperature ranging from 300°C to about 700°C under vacuum, inert gas or reducing gas. A particularly suitable dewax cycle is heating to about 350°C under
25 vacuum for a time sufficient to remove most of the organic additives followed by heating to 450°C in an atmosphere containing hydrogen gas. Alternative gas atmospheres, such as argon, and even a vacuum may be used in the dewax cycle.

- 30 The green body is then consolidated at a temperature, superatmospheric pressure, time at temperature and time at superatmospheric pressure

sufficient to form a densified multiple-region body. The consolidation may occur with or without the formation of a liquid in the body. The consolidation temperature should be sufficiently high to cause the green body to densify at the superatmospheric pressure described herein. In a preferred aspect, the temperature should also be less than a temperature where a liquid phase is formed in the green body with little, if any, grain growth of the hard component. A suitable temperature range is from about 800°C to about 1500°C, preferably about 800°C to about 1350°C, more preferably from about 900°C to about 1300°C, even more preferably from about 1000°C to about 1300°C, and most preferably from about 1050°C to about 1250°C.

The consolidation time may be as short as possible while still forming the densified multiple-region body. The consolidation time should be a time that precludes excessive grain growth of substantially all the hard particulate while still achieving the desired density of the multiple-region body. Preferably, the time and temperature are such that the hard particulate exhibits substantially no growth, and stay substantially the same before and after consolidation at elevated temperatures. Suitable times range from about 1 minute to about 24 hours. Preferably, the time is at most about 12 hours, more preferably at most about 6 hours, even more preferably at most about 3 hours, and most preferably at most about 1 hour to preferably at least about 5 minutes, more preferably at least about 10 minutes, and most preferably at least about 15 minutes.

The entire time or only a portion of the time at the consolidation temperature may be at the elevated pressure according to the present invention (i.e., the time at superatmospheric pressure is less than or equal to the time at temperature). For practical reasons, the time at superatmospheric pressure is advantageously as short as possible while still attaining the densified multiple-region body 10. Preferably, the time at superatmospheric pressure at the consolidation temperature is at most about 30 minutes, more preferably at most about 10 minutes, even more preferably at most about 60 seconds and most preferably at most about 15 seconds to preferably at least about 2 seconds.

The superatmospheric pressure at the consolidation temperature should be at least a pressure such that the resulting graded composite or multiple-region body includes a hardmetal essentially free of porosity. For example, a porosity better than A02, B00 and C00, such as A00, B00 and C00, may be one characteristic of a hardmetal body; however, a porosity no greater than A06, B00 and C08 is believed to be sufficient. The superatmospheric pressure should be less than a pressure, wherein the graded composite hardmetal would start to plastically deform to an extent where catastrophic failure of the body 10 may occur. Preferably, the superatmospheric pressure is at most about 1,000,000 pounds per square inch "psi" (6.89 GPa), more preferably at most about 500,000 psi (3.45 GPa) to at least about 10,000 (68.9 MPa) psi, more preferably at least about 50,000 psi (345 MPa), and most preferably at least about 100,000 psi (689 MPa).

Representative methods for consolidation the green body include Rapid Omnidirectional Compaction (ROC), placing a green body in a bed of pressure transmission particles, hot isostatic pressing (HIP), uniaxial hot pressing, or pressureless or vacuum sintering followed by one of the aforementioned superatmospheric techniques, an example being sinter-HIP. Various aspect of using a bed of pressure transmitting particles are taught by Meeks et al. (U.S. Patent No's. 5,032,352 and 4,975,414); Anderson et al. (U.S. Patent No's. 4,980,340 and 4,808,224); Oslin (U.S. Patent No. 4,933,140); and Chan et al. (U.S. Patent No. 4,915,605). Various aspects of sinter-HIP are taught by Lueth (U.S. Patent No's. 4,591,481 and 4,431,605). Preferably, the method consolidation comprises ROC-various aspects being taught by Timm (US Patent No. 4,744,943), Lizenby (US Patent Nos. 4,656,002 and 4,341,557), Rozmus (US Patent No. 4,428,906) and Kelto (Metals Handbook, "Rapid Omnidirectional Compaction" Vol. 7, pages 542-546), the subject matter of each is hereby incorporated in its entirety herein by reference.

In the ROC process according to the present invention, multiple green bodies, a green body and a sintered body, multiple sintered bodies, a green body and a ceramic metal body, or a sintered hardmetal and a ceramic or metal body are first embedded in a pressure transmitting material that acts like a viscous liquid at the consolidation temperature, the material and green body being contained in a shell. The green body may be enveloped in a barrier layer such as graphite foil or boron nitride. Suitable pressure transmitting

materials include glasses that have sufficient viscosity so that the glass fails to penetrate the body under an applied pressure. Representative glasses include glasses containing high concentrations of silica and boron. A commercial glass useful in the temperature range from 1000°C. to 1400°C. is Corning-type PYREX 7740™ glass. Pressure transmitting materials are described in more detail in US Patent Nos. 4,446,100; 3,469,976; 3,455,682 and 4,744,943. Each patent relating to consolidation incorporated herein by reference in their entirety.

The shell containing the green body or green bodies and pressure transmitting medium preferably forms an enclosed right cylinder that can be placed in pot die tooling of a forging press. The pot die tooling, as it is known in the forging industry, consists of a cylindrical cavity closed at one end by an ejector assembly and at the other by a cylindrical ram. Upon compression in the tooling, the shell must distort predictably and not crack or leak.

The preferred shell material for the temperature range from 150°C to about 1650°C using glass pressure transmitting media is a shell cast of a thixotropic ceramic, as described by US Patent. No. 4,428,906, at col. 3, lines 58-68, and col. 4, lines 1-27, incorporated herein by reference. The thixotropic ceramic material comprises a ceramic skeleton network and pressure transmitting material that deforms or fractures allowing compression of the pressure transmitting material, while retaining enough structural integrity to keep the pressure transmitting fluid from leaking out of the pot die.

Once the bodies are embedded in the pressure transmitting material contained in the shell, this shell assembly is heated in an inert atmosphere to a temperature suitable for forging. The temperature of this step is as described previously. The time at temperature must be a time sufficient to completely fluidize the pressure-transmitting medium and to bring the bodies to a temperature roughly in equilibrium with the temperature of the pressure transmitting material.

Typical times range from about 1 to 3 hours for both heating to the consolidation temperature and maintaining the consolidation temperature. The time at the sintering temperature is maintained generally from about 1 to 30 minutes before being pressed in the pot die of the forging pressed described below.

The heated shell assembly is pressed in a forging press as described below and by Timm, U.S. Patent. No. 4,744,943, at col. 9, lines 50 68, and col. 10, lines 1 3, incorporated herein by reference. The heated shell is pressed in the forging press by compressing the assembly with a ram in a closed cavity such as the pot die tooling previously described. As the ram compresses the assembly in the cavity, the pressure transmitting material exerts a large hydrostatic pressure on the bodies to densify them. The shell material of the assembly flows into the clearance between the ram and pot die and forms, in effect, a pressure seal so that the liquid pressure transmitting material does not escape into the pot die. After pressing, the shell assembly is ejected from the pot die

After ejection from the pot die, the densified bodies are separated from the pressure transmitting material (PTM) by a method such as pouring the liquid PTM through a screen, the densified bodies being
5 retained on the screen which is described in greater detail in Timm, U.S. Pat. No. 4,744,943, at col. 10, lines 5-27, incorporated herein by reference. Any residual material remaining on the bodies may be removed by, for example, sand blasting. The entire
10 assembly may also be cooled to room temperature before removing the densified bodies. The bodies are subsequently removed from the hardened glass PTM, for example, by breaking the glass PTM with a hammer. Further finishing of the densified bodies such as
15 grinding and polishing may be performed.

The present invention is illustrated by the following, which is provided to demonstrate and clarify various aspects of the present invention. The following should not be construed as limiting the scope
20 of the claimed invention.

Raw materials used preparing a hardmetal for a multiple-region body are listed in Table 1. Source for these materials are known by those skilled in the art and include Kennametal Inc. Latrobe, Pennsylvania, USA,
25 Teladyne Advanced materials located in Levern Tennessee, OMG headquartered in Cleveland, Ohio, Osram materials corporation located in Towanda, PA, USA.

Spray-dried mixtures comprising tungsten carbide with about 0 wt.% to about 20 wt.% cobalt pressed into
30 green bodies were mated to a second body and subsequently subjected to dewaxing. The green bodies were consolidated using ROC at about 1150°C for a

couple of minutes to produce multiple-region bodies. Several of the multiple-region bodies were cut, mounted, and polished to study their microstructures. The results of an examination of the interface between the hardmetal and the additional hardmetal revealed good bonding between them. The multiple-region bodies contained substantially no porosity.

Table 1 Starting Materials		
Material	Size	Source
Tungsten Carbide	0.2-40 μm	OMG, Osram, Kennametal
Cobalt	0.2-5 μm	OMG, Afro-Met

Table 2
Comparison of the Prior Art

Prior Art 1			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	10.9	5.95	Binder migrated into this body from the second
Binder Chemistry	Cobalt	Cobalt	
Particle Size	6.7 μm	7.8 μm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	9.6	11.4	Binder migrated from this body into the first
Binder Chemistry	Cobalt	Cobalt	
Particle Size	2.8 μm	2.8 μm	
Prior Art 2			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	2.5	4.5	Binder migrated into this body from the second
Binder Chemistry	Cobalt	Cobalt	
Particle Size	1-5 μm	1-5 μm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	7.2	6.0	Binder migrated from this body into the first
Binder Chemistry	Cobalt	Cobalt	
Particle Size	1-12 μm	1-12 μm	
Prior Art 3			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	12	~9	After an about 9 hour sintering, the binder level homogenized
Binder Chemistry	Cobalt	Cobalt	
Particle Size	0.5-10 μm	0.5-10 μm	
	2 nd Green Body	2 nd Hardmetal Body	
Wt.% Binder	6	~9	
Binder Chemistry	Cobalt	Cobalt	
Particle Size	0.5-10 μm	0.5-10 μm	
Prior Art 4			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	12	~11	After about 45 minutes at about 2100°F a continuously varying binder level resulted
Binder Chemistry	Cobalt	Cobalt	
Particle Size	0.5-10 μm	0.5-10 μm	
	2 nd Green Body	2 nd Hardmetal Body	
Wt.% Binder	6	6	
Binder Chemistry	Cobalt	Cobalt	
Particle Size	0.5-10 μm	0.5-10 μm	

TABLE 3
SAMPLES MADE BY THE PRESENT INVENTION

Sample A (different binder chemistry)			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	14	14	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	2.8 %Nickel 11.2 %Cobalt	2.8 %Nickel 11.2 %Cobalt	
Particle Size	~3.2µm	~2.5µm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	14	14	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~2.5µm	
Sample B(different green bodies)			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	6	6	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~2.5µm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	8	8	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~5.2µm	~4µm	
Sample C(different sintered hardmetal bodies)			
	1 st Hardmetal Body	1 st Hardmetal Body	Comments
Wt.% Binder	6	6	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~3.2µm	
	2 nd Hardmetal Body	2 nd Hardmetal Body	Comments
Wt.% Binder	8	8	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~5.4µm	~5.4µm	
Sample D(metal body and sintered hard metal body)			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	6	6	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~3.3µm	
	Metal Body	Metal Body	Comments
Wt.% Binder			The interface had substantially no porosity, substantially no intermetallics and substantially no porosity
Binder Chemistry		4340 steel	
Particle Size			
Sample E(different green bodies)			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	13	13	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~2.5µm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	16	16	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~2.5µm	
Sample F(different green bodies)			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	13	13	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2	~2.5	

TABLE 3
SAMPLES MADE BY THE PRESENT INVENTION

	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	16	16	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~5.4µm	~4.8µm	
Sample G(different green bodies)			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	0	0	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry			
Particle Size	0.4µm	0.3µm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	13	13	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~2.5µm	
Sample H(different green bodies)			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	10	10	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~1.0µm	~1µm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	8	8	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	5.2µm	~4.2µm	
Sample I(different green bodies) – Roc temp 1400C			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	14	14	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~3.5µm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	14	14	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~5.2µm	~5.4µm	
Sample J(different green bodies) – Roc temp 1400C			
	1 st Green Body	1 st Hardmetal Body	Comments
Wt.% Binder	6	7.2	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	~3.2µm	~3.4µm	
	2 nd Green Body	2 nd Hardmetal Body	Comments
Wt.% Binder	8	7.2	The hardmetal had an A00, B00, C00 porosity rating
Binder Chemistry	Co	Co	
Particle Size	5.2µm	~5.3µm	

Note: The grain size of the green body was obtained by measuring the WC grain size in a sintered piece obtained by sintering the WC raw materials with 6% Co at 1440C in a SinterHIP furnace. All sub micron grains had 0.2%VC in them.

The metal content of the hardmetal bodies of Table 3 was determined by inductively coupled argon plasma emission spectroscopy using the radial viewing mode. A four point multivariate calibration was performed with calibration solutions produced from high purity metals, and accuracy verified to one percent relative using synthetically prepared quality assurance samples. The equipment used was a Perkin-Elmer 3300DV spectrometer.

The data of Table 3 for the green bodies was obtained from consolidated monolithic bodies. The data of Table 3 for multiple-region bodies was obtained from sections of the 1st hardmetal body and the 2nd hardmetal body that had been cut from the multiple-region bodies to exclude the substantially discontinuous gradient-free boundary between the autogenously and/or contiguously contacting 1st hardmetal body and 2nd hardmetal body. In an aspect of the present invention, the substantially discontinuous gradient-free boundary between the autogenously and/or contiguously contacting hardmetal body and additional body may refer to the substantially discontinuous gradient-free change of the content and/or composition of the binder.

Other embodiments of the invention will be apparent to those skilled in the art from a consideration of the specification or practice of the invention disclosed herein. For example, the multiple-region bodies of the present invention may be used for materials manipulation or removal including, for example, as buttons or inserts or portions of buttons or inserts for oil field tools, petroleum industry or exploration tools, mining, construction, agricultural, wear, and metal removal applications.

Some examples of oil field tools, petroleum industry or exploration tools include down the hole bits including fixed cutting bits, tricone and rotating percussion bits having hard inserts and/or buttons therein. Some multiple-region bodies for use, for example, as a petroleum bit made in accordance with the present invention included an about 10 wt.% cobalt cemented tungsten carbide (WC) hardmetal body comprising the top and forward portion of the petroleum bit autogenously and/or contiguously bonded to an about 12 wt.% cobalt cemented tungsten carbide (WC) additional hardmetal body comprising the outside and reward portion of the petroleum bit. Other multiple-region bodies for use, for example, as a petroleum bit (for fixed cutters) made in accordance with the present invention included an about 13 wt.% cobalt cemented tungsten carbide (WC) hardmetal body comprising the top and forward portion of the petroleum bit surrounded and supported by an about 16 wt.% cobalt cemented tungsten carbide (WC) additional hardmetal body comprising the outside and reward portion of the petroleum bit. Another use of multiple-region bodies, for example, is as a petroleum bit (for fixed cutters) made in accordance with the present invention including an about 13 wt.% cobalt cemented tungsten carbide (WC) hardmetal body comprising the top and forward portion of the petroleum bit surrounded and supported by an about 14 wt.% cobalt cemented tungsten carbide (WC) additional hardmetal body comprising the outside and reward portion of the petroleum bit. Thus, these multiple-region bits may comprise a hardmetal body 12 comprising about 0 to about 20 wt.% binder and a grain

size of about 0.2 μ m to about 8 μ m and an additional hardmetal body 14 comprising about 6 wt.% to about 25 wt.% and a grain size of about 2 μ m to about 8 μ m.

Some examples of agricultural applications include
5 inserts for agricultural tools, disc blades, seed boots, stump cutters or grinders, furrowing tools, and earth working tools.

Some examples of mining and construction
applications include cutting or digging tools, earth
10 augers, mineral or rock drills, construction equipment blades, rolling cutters, earth working tools, comminution machines, and excavation tools.

More particular examples of mining and
construction applications include conical style
15 inserts, or portions thereof, for road milling and road planing, rotatable construction bits and rotatable scale mining bits, conical, cylindrical, flat or log cabin style inserts, or portions of inserts, for roof bits, nonrotatable mining bits, auger bits, snowplow
20 blades and scarifier blades.

Some multiple-region bodies for use, for example, as a percussion bit made in accordance with the present invention included an about 6 wt.% cobalt cemented tungsten carbide (WC) hardmetal body comprising the top
25 and forward portion of the percussion bit surrounded and supported by an about 8 wt.% cobalt cemented tungsten carbide (WC) additional hardmetal body comprising the outside and reward portion of the percussion bit. The percussion bit body was cross-
30 sectioned, polished and the Rockwell A (Ra) measured along substantially equidistant intervals from the hardmetal body 12 across the substantially

discontinuous gradient-free boundary to additional hardmetal body 14. The Ra hardness of the hardmetal body 12 measured 91.3, 91.4 and 91.4 moving toward the substantially discontinuous gradient-free boundary.

- 5 The Ra hardness of the additional hardmetal body 14 measured 89.9, 89.8 and 89.9 moving away from the substantially discontinuous gradient-free boundary.

Some examples of wear applications include anvils for, among other things, high-pressure high-temperature
10 superhard materials manufacturing, nozzles or portions of nozzles for directing abrasive materials such as sand blasting nozzles, waterjet nozzles and abrasive waterjet nozzles.

- Some examples of materials removal applications
15 include drills, endmills, reamers, threading tools, or turning, boring, drilling, milling or sawing inserts, incorporating chip control features, and materials cutting or turning, boring, drilling milling or sawing inserts comprising coating applied by any of chemical
20 vapor deposition (CVD), physical vapor deposition (PVD), modifications of CVD and/or PVD, combinations of CVD and PVD, conversion coating, etc.

- Some multiple-region bodies for use, for example, as an end mill made in accordance with the present
25 invention included an about 10 wt.% cobalt cemented fine grained tungsten carbide (WC) hardmetal body comprising the outside or sleeve portion of the end mill surrounding an about 8 wt.% cobalt cemented coarse grained tungsten carbide (WC) additional hardmetal body
30 comprising the core portion of the end mill. Other multiple-region bodies for use, for example, as a drill made in accordance with the present invention included

an about 6 wt.% cobalt cemented fine grained tungsten carbide (WC) hardmetal body comprising the outside or sleeve portion of the drill surrounding an about 8 wt.% cobalt cemented coarse grained tungsten carbide (WC) additional hardmetal body comprising the core portion of the end mill.

Some multiple-region bodies for use, for example, as a superhard material substrate were made in accordance with the present invention. Applicants have found that these multiple-region superhard material substrates may comprise a hardmetal body 12 comprising about 6 wt.% to about 16 wt.% binder and a grain size of about 2 μ m to about 8 μ m and an additional hardmetal body 14 comprising about 8 wt.% to about 20 wt.% and a grain size of about 2 μ m to about 10 μ m.

The subject matter of all documents, including patents and patent publications, referred to in the present application is hereby incorporated by reference in its entirety herein.

It is intended that the specification and examples be considered as illustrative only, with the true scope and spirit of the invention being indicated by the following claims.

WHAT IS CLAIMED IS:

1. A tool piece comprising:
 - (a) a hardmetal body;
 - (b) an additional body contiguously
5 contacting the hardmetal body; and
 - (c) a substantially discontinuous
gradient-free boundary between the
hardmetal body and the additional body.
2. The tool piece according to Claim 1, further
10 including a mating surface between the hardmetal body
and the additional body.
3. The tool piece according to Claim 2, wherein
the mating surface includes a male portion on one of
the bodies and a corresponding female portion on the
15 other of the bodies.
4. The tool piece according to Claim 3, wherein
the mating surface is symmetrical.
5. The tool piece according to Claim 4, wherein
the mating surface is axially symmetrical.
- 20 6. The tool piece according to Claim 5, wherein
the mating surface is dimpled.
7. The tool piece according to Claim 3, wherein
the mating surface is asymmetrical.
8. The tool piece according to Claim 3, further
25 including both micro and macro mating features.
9. The tool piece according to Claim 8, wherein
the micro and macro mating features are represented as
a periodic function subdivided into a finite number of
continuous intervals within it period.
- 30 10. The tool piece according to Claim 8, wherein
the micro and macro mating features include one or more
of half circles, half ovals, half ellipses, triangles,

sawtooth curves, and truncated versions of any of the preceding.

11. The tool piece according to Claim 8, wherein the micro feature and macro feature comprise a macro
5 feature area to a perturbed macro feature area ratio comprising slightly greater than about 1:1 to about 1:50.

12. The tool piece according to Claim 11, wherein the micro feature and macro feature comprise a macro
10 feature area to a perturbed macro feature area ratio comprising slightly greater than about 1:1 to about 1:10.

13. The tool piece according to Claim 8, wherein the micro mating feature comprises a size of about
15 100 μ m to about 1cm.

14. The tool piece according to Claim 1 wherein the hardmetal has a porosity rating of no higher than substantially A06, B00, C08 to better than substantially A02, B00 and C00.

20 15. A tool piece, the tool piece comprising:

- (a) a hardmetal body including a hard particle component and a binder;
- (b) an additional body contiguously contacting the hardmetal body; and
- 25 (c) a substantially discontinuous gradient-free boundary between the hardmetal body and the additional body.

16. The tool piece according to Claim 15, wherein the additional body comprises at least one of a metal
30 body, a ceramic body, and an addition hardmetal body.

17. The tool piece according to Claim 15, wherein the additional body comprises at least one addition

hardmetal body including a hard particle component and a binder.

18. The tool piece according to Claim 17, wherein the hard particle components are a carbide.

5 19. The tool piece according to Claim 18, wherein the carbide is a tungsten carbide.

20. The tool piece according to Claim 19, wherein the carbide grain size is about 0.2 μm to about 40 μm .

10 21. The tool piece according to Claim 17, wherein the binder of the hardmetal bodies is selected from the group consisting of cobalt, nickel and iron and their alloys.

15 22. The tool piece according to Claim 21, wherein the binder of the hardmetal body comprise a composition substantially different from the binder of the additional hardmetal body.

23. The tool piece according to Claim 15, wherein the binder comprises cobalt or cobalt alloys.

20 24. The tool piece according to Claim 8, wherein the binder of each hardmetal body is about 0 wt.% to about 25 wt.%.

25. A tool piece, the tool piece comprising:

- 25 (a) a hardmetal body including a hard particle component and a binder;
- (b) an additional body contiguously contacting the hardmetal body;
- (c) a substantially discontinuous gradient-free boundary between the
- 30 hardmetal body and the additional body; and

(d) a mating surface between the hardmetal body and the additional body.

26. A method for producing a tool piece, the method comprising:

5 forming a mixture by mechanically mixing a hard particle component with a binder or binder precursor;

 shaping the mixture into a green body;

 juxtaposing an additional body and to green

10 body

 consolidating the juxtaposed green body and additional body at a preselected temperature, superatmospheric pressure and time at temperature and time at superatmospheric pressure sufficient to form a
15 hardmetal body and a substantially discontinuous gradient-free boundary between the hardmetal body and the additional body, at least a portion of the time at superatmospheric pressure is at the preselected temperature.

20 27. The method of claim 26 wherein the superatmospheric pressure is applied by rapid omnidirectional compaction.

25 28. The method claim 26 wherein the time at superatmospheric pressure is less than the time at temperature.

29. The method of claim 26 wherein the time at superatmospheric pressure is from about 2 seconds to 10 minutes.

30 30. The method of claim 29 wherein the time at superatmospheric pressure is from about 2 seconds to about 1 minute.

31. The method of claim 26 wherein the time at temperature is from about 10 minutes to about 6 hours.

32. The method of claim 31 wherein the time at temperature is from about 15 minutes to about 1 hour.

5 33. The method of claim 26 wherein the mechanical mixing is milling.

34. The method of claim 26 wherein the superatmospheric pressure is at least about 10,000 pounds per square inch.

10 35. The method of claim 34 wherein the superatmospheric pressure is at most about 1,000,000 pounds per square inch.

36. The method of claim 26 wherein the green body is consolidated to a hardmetal body prior to
15 juxtaposing and the juxtaposing involves the additional body and the hardmetal body.

37. The method of claim 26 wherein the additional body comprises an additional hardmetal body, the binder content of a green body for the hardmetal is
20 substantially the same prior to and following the consolidating.

38. The method of claim 26 wherein a hard particulate component size of the green body is substantially the same as that of the resulting
25 hardmetal body.

39. The method of claim 26 wherein the hardmetal has substantially no porosity.

40. The method of claim 39 wherein the hardmetal has a porosity rating of no higher than substantially
30 A06, B00, C08 to better than substantially A02, B00 and C00.

41. The method of claim 26 wherein the consolidating occurs without the formation of a liquid in the hardmetal body.

$\{ \begin{smallmatrix} 11 \\ 12 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 13 \\ 14 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 15 \\ 16 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 17 \\ 18 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 19 \\ 20 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 21 \\ 22 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 23 \\ 24 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 25 \\ 26 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 27 \\ 28 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 29 \\ 30 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 31 \\ 32 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 33 \\ 34 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 35 \\ 36 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 37 \\ 38 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 39 \\ 40 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 41 \\ 42 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 43 \\ 44 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 45 \\ 46 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 47 \\ 48 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 49 \\ 50 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 51 \\ 52 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 53 \\ 54 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 55 \\ 56 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 57 \\ 58 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 59 \\ 60 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 61 \\ 62 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 63 \\ 64 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 65 \\ 66 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 67 \\ 68 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 69 \\ 70 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 71 \\ 72 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 73 \\ 74 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 75 \\ 76 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 77 \\ 78 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 79 \\ 80 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 81 \\ 82 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 83 \\ 84 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 85 \\ 86 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 87 \\ 88 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 89 \\ 90 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 91 \\ 92 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 93 \\ 94 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 95 \\ 96 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 97 \\ 98 \end{smallmatrix} \}$
 $\{ \begin{smallmatrix} 99 \\ 100 \end{smallmatrix} \}$

ABSTRACT

A multiple-region hardmetal tool piece. The tool piece includes a hardmetal body including a hard particle component and a binder; an additional body, 5 the additional body including a hardmetal body having a hard particle component and a binder; a metal body or a ceramic body; a substantially discontinuous gradient-free boundary layer between the hardmetal body and the additional body; and a mating surface between 10 the hardmetal body and the additional body. In the preferred embodiment, the hard particle components are a carbide, such as tungsten carbide. In the preferred embodiment, the mating surface includes a male portion on one of the bodies and a corresponding female portion 15 on the other of the bodies. The mating surface is symmetrical or asymmetrical and, in the preferred embodiment, the mating surface is axially symmetrical, such as a dimple. The mating surface may further including both micro and macro mating features.

20

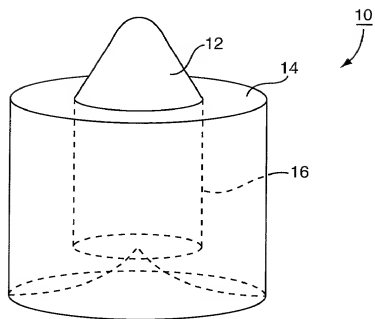


FIG. 1A

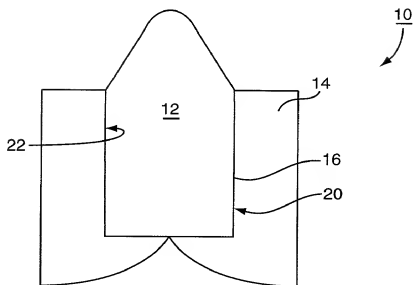


FIG. 1B




FIG. 2A




FIG. 2B




FIG. 2C




FIG. 3A




FIG. 3B




FIG. 3C

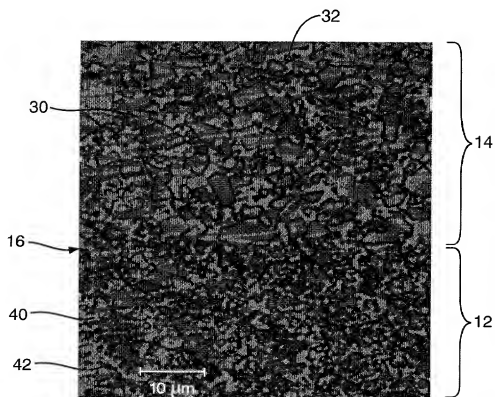


FIG 4

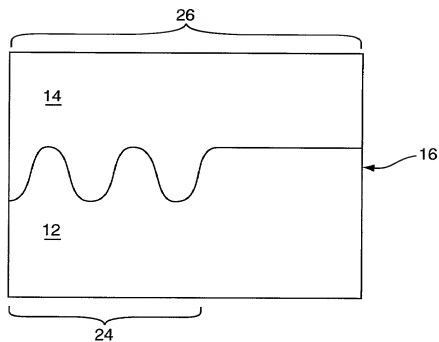


FIG. 5

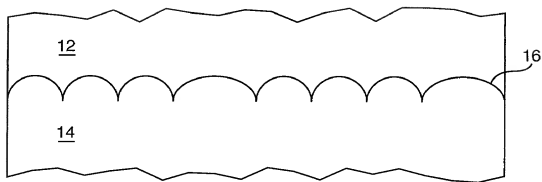


FIG. 6A

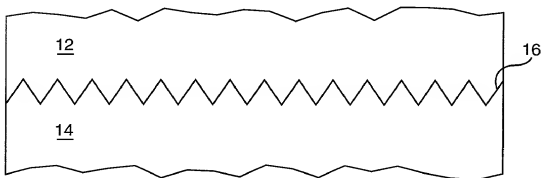


FIG. 6B

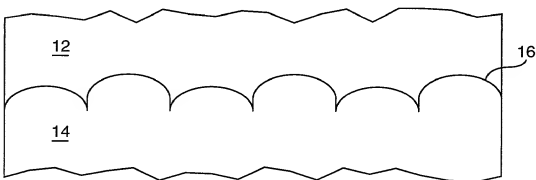


FIG. 6C

COMBINED DECLARATION AND POWER OF ATTORNEY*(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT OR CIP APPLICATION)*

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: GRADED COMPOSITE HARDMETALS

the specification of which: *(complete (a), (b) or (c) for type of application)*

REGULAR OR DESIGN APPLICATION

- (a) ☒ is attached hereto.
 (b) ☐ was filed on _____ as Application Serial No. _____ and was amended on _____.

PCT FILED APPLICATION ENTERING NATIONAL STAGE

- (c) ☐ was described and claimed in International Application No. _____ filed on _____ and as amended on _____.

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations. §1.56(a).

- ☐ In compliance with this duty there is attached an information disclosure statement. 37 CFR 1.97.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

(complete (d) or (e))

- (d) ☒ no such applications have been filed.
 (e) ☐ such applications have been filed as follows:

**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
 (6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION**

Country	Application No.	Date of Filing (day, month, year)	Date of Issue (day, month, year)	Priority Claimed

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
 (6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION**

Country	Application No.	Date of Filing (day, month, year)	Date of Issue (day, month, year)	Priority Claimed

CONTINUATION-IN-PART*(complete this part only if this is a continuation-in-part application)*

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Registrations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)	(patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status)	(patented, pending, abandoned)

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.
(List name and registration number)

John J. Prizzi	Registration No. 29,970
Larry R. Meenan	Registration No. 33,423
Stanislav Antolin	Registration No. 34,979
James G. Porcelli	Registration No. 33,757
Stephen T. Belsheim	Registration No. 28,688
John M. Halan	Registration No. 35,534
Thomas W. Cole	Registration No. 28,290
Thomas Lizzi	Registration No. 35,252

SEND CORRESPONDENCE TO:**DIRECT TELEPHONE CALLS TO:**

John J. Prizzi
 Kennametal Inc.
 P. O. Box 231
 Latrobe, PA 15650

John J. Prizzi
 (724) 539-5331

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Shivanand Majagi

Inventor's signature _____

Date _____ Country of Citizenship India

Residence Rogers, Arkansas 72758

Post Office Address 1724 South 41st Street, Rogers, AR 72758

Full name of second joint inventor, if any Robert W. Britzke

Inventor's signature _____

Date _____ Country of Citizenship U.S.A.

Residence Rogers, Arkansas 72756

Post Office Address 106 Woodrock Lane, Rogers, AR 72756

CHECK PROPER BOX(ES) FOR ANY ADDED PAGE(S) FORMING A PART OF THIS DECLARATION

- ☒ [X] Signature for third and subsequent joint inventors.
Number of pages added 1.
- ☐ [] Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor. Number of pages added ____.
- ☐ [] Signature for inventor who refuses to sign or cannot be reached by person authorized under 35 CFR 1.47. Number of pages added ____.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
21

ADDED PAGE TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR SIGNATURE BY
THIRD AND SUBSEQUENT INVENTORSFull name of third joint inventor, if any Daniel W. Nelson

Inventor's signature _____

Date _____ Country of Citizenship U.S.A.Residence Rogers, Arkansas 72758Post Office Address 2104 Dogwood Street, Rogers, AR 72758

Full name of fourth joint inventor, if any _____

Inventor's signature _____

Date _____ Country of Citizenship U.S.A.

Residence _____

Post Office Address _____

Full name of fifth joint inventor, if any _____

Inventor's signature _____

Date _____ Country of Citizenship U.S.A.

Residence _____

Post Office Address _____

Full name of sixth joint inventor, if any _____

Inventor's signature _____

Date _____ Country of Citizenship U.S.A.

Residence _____

Post Office Address _____

Full name of seventh joint inventor, if any _____

Inventor's signature _____

Date _____ Country of Citizenship U.S.A.

Residence _____

Post Office Address _____